


SE-500



COMPOSITE & S-VIDEO SWITCHER – 4 INPUT



Everything you need to switch and monitor four composite video or S-Video sources. Sophisticated monitor functions show you quad split, next source and next effect. This small, rugged switcher is ideal for educational and security applications.

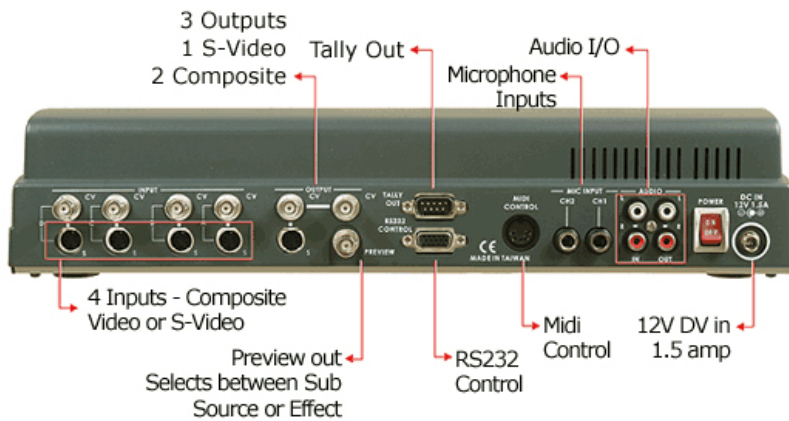

Video Input / Output

Video Formats

4 Channel Video switcher
NTSC/PAL selectable

Video Outputs

2 x Composite Video, 1 x S-Video
Next Source Preview Output:
1 x Composite Video

Video Inputs

4 x Composite Video, 4 x S-Video

Audio Input

1 Stereo phono (Aux)
2 Microphone inputs (L/R)

Audio Output

Stereo Audio Phono Output
5-Pin Midi Control Interface Headphone Monitor
3.5 Plug out with Volume Control

FEATURES

Preview Control
Selectable sub-source monitoring or effect preview
8 different background colors



12 effects



Headphone jack and control on the front



Audio mixer



RS-232 Control



Ergonomic T-Bar



MIDI Control

SPECIFICATION

Built-in Four Channel Frame Synchronizer (TBCs) – No genlock required.

Video Bandwidth: S (Y/C) 5.0MHz
Composite 4.5MHz

Audio Bandwidth: 20 to 20KHz +/- 3dB

Signal/Noise Ratio: Video 50 dB Audio 65dB

DG Amplitude tolerance: < +/- 3%

DP (Phase tolerance): < 3°

Audio THD: < 0.1% SE-500

Unit Dimensions

Width: 15.7 inches/400 mm
Depth: 9.8 inches/250 mm
Height: 3.2 inches/80 mm
Net Weight: 4.40lbs/2.0 Kgs

Datavideo Authorised Distributor:

Graphics Vision
(M) Sdn. Bhd. (175178-V)

117, Jalan Aminuddin Baki, Taman Tun Dr Ismail, 60000 Kuala Lumpur.
Tel : 603-7727 1868 Fax : 603-7729 1868 email : gvision@pc.iaring.my
websites : www.graphics-vision.com